SS-CN2M/MS2M

SERVICE MANUAL

Ver 1.0 2003. 05

AEP Model
UK Model

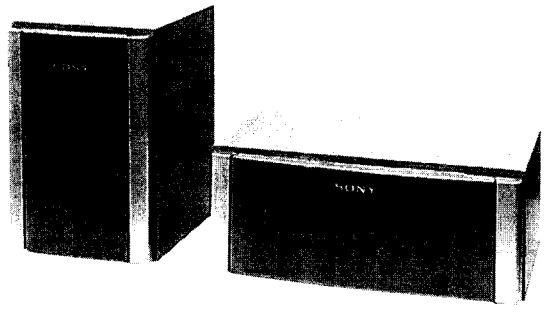

SS-MS2M SS-CN2M

• SS-CN2M (center speaker) and SS-MS2M (front and surround speaker) is the speaker section in SA-VE2M.

SPECIFICATIONS

SS-MS2M (Front and surround speakers)

Speaker system	Full range, magnetically shielded
Speaker units	8 cm, cone type
Enclosure type	Bass reflex
Rated impedance	8 ohms
Power handling capacity	
Maximum input power:	100 watts
Sensitivity level	84 dB (1 W, 1 m)
Frequency range	28 Hz - 20,000 Hz
Dimensions (w/h/d)	Approx. 105 × 153 × 128 mm, including front grille
Mass	Approx. 1.2 kg each

SS-CN2M (Center speaker)

Speaker system	Full range, magnetically shielded
Speaker units	5 cm, cone type
Enclosure type	Bass reflex
Rated impedance	8 ohms
Power handling capacity	
Maximum input power:	100 watts
Sensitivity level	84 dB (1 W, 1 m)
Frequency range	28 Hz - 20,000 Hz
Dimensions (w/h/d)	Approx. 200 × 79 × 131 mm, including front grille
Mass	Approx. 0.8 kg

SPEAKER SYSTEM

9-877-361-01
2003E04-1
© 2003. 05
Sony Corporation
Home Audio Company
Published by Sony Engineering Corporation

SONY®

EXPLODED VIEWS

NOTE:
- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

- Color Indication of Appearance Parts
  Example :
  KNOB, BALANCE (WHITE) ... (RED)
  ↑ ↑
  Parts Color Cabinet's Color

SS-CN2M

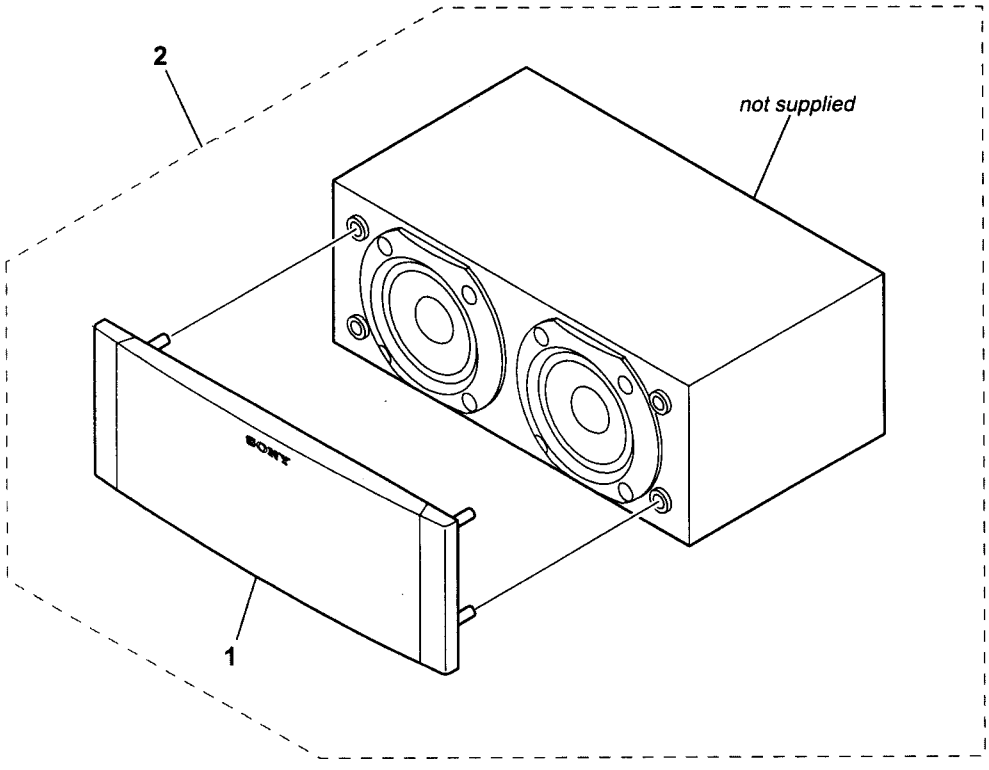

Ref. No.	Part No.	Description	Remark
1	X-4955-179-1	FRAME ASSY, GRILLE	
2	A-4738-650-A	OVERALL ASSY	

SS-MS2M

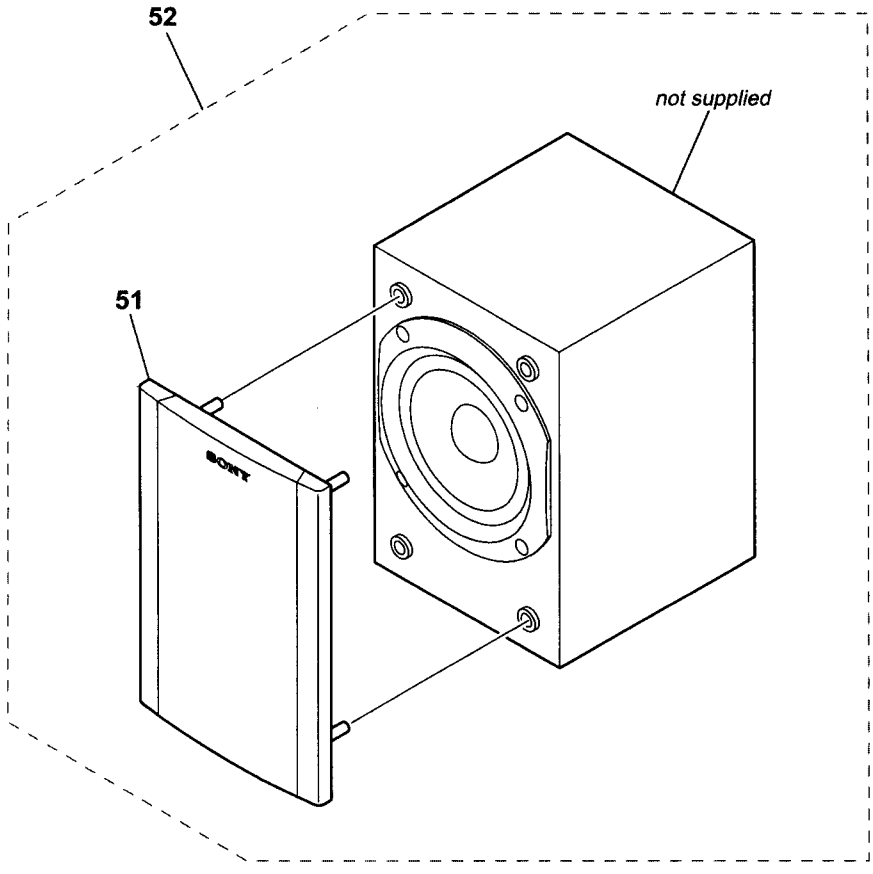

Ref. No.	Part No.	Description	Remark
51	X-4955-172-1	FRAME ASSY, GRILLE	
52	A-4738-649-A	OVERALL ASSY	